



iPhone 5s Rear Facing Camera Replacement

Prerequisite to remove the camera after the logic board.

Written By: Sam Lionheart



INTRODUCTION


Prerequisite to remove the camera after the logic board.




TOOLS:

- [Tweezers](#) (1)
-

Step 1 — Rear Facing Camera

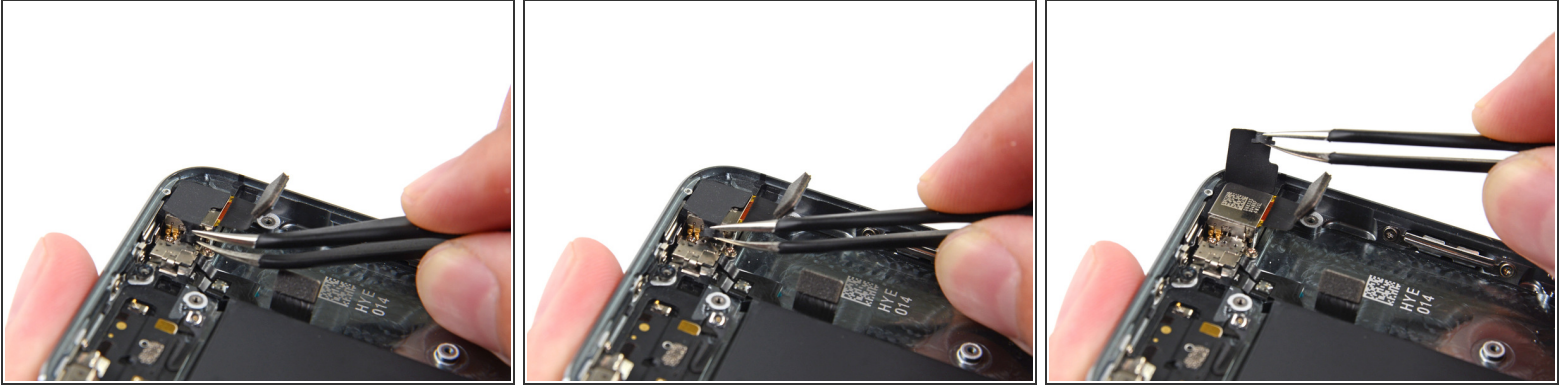



- Using a pair of tweezers, flip the rubber camera cover out of its clip and toward the outside of the rear case.

 **Do not** attempt to fully remove this cover. It is attached to the rear case and only needs to be flipped open, not removed.

Step 2



- Remove the rear-facing camera from the rear case.
-  During reassembly, the camera cable should bend in a 'U' shape to slot in behind the logic board.
 -  If the rubber camera bumper has shifted, be sure to replace it before reassembling your iPhone.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-09-23 01:55:50 PM.